


# KORAL 990

Зип Общежитие
vsezip.ru
+7(812)987-08-81

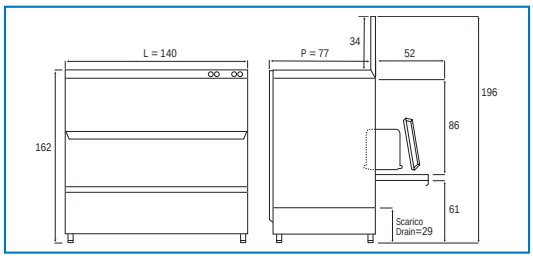

## Caratteristiche tecniche
### Technical features/Caracteristicas técnicas

| | |
|---|---|
| **Elettropompa**/*Wash-Pump/Electrobomba* | (2,2 Kw - 3,0 Hp) x 2 |
| **Tensione alimentaz.**/*Input Voltage/Tensión alimentación* | V 380-400/3+N+T Hz 50/60 |
| **Assorbimento tot.**/*Total power input/Potencia total* | 13,5 Kw |
| **Capacità boiler**/*Boiler capacity/Capacidad boiler* | 7,9 Lt. |
| **Resistenza boiler**/*Boiler heating element/Resistencia boiler* | 6 Kw |
| **Capacità vasca**/*Tank capacity/Capacidad cuba* | 90 Lt. |
| **Resistenza vasca**/*Tank heating element/Resistencia cuba* | 3,0 + 3,0 + 3,0 Kw |
| **Consumo acqua ciclo** | |
| *Water consumption cycle/Consumo de agua por ciclo* | 2,5 - 3,5 Lt. |
| **Pressione alimentaz.** | |
| *Input Water Pressure/Presión alimentación* | 2÷4 BAR |
| **Ciclo di lavaggio**/*Washing Cicle/Ciclo de lavado* | 120/240/360 sec. |
| **Lungh. tubo alimentaz.** | |
| *Feeding tube height/Largo tubo alimentación* (3/4 Gas) | 1,50 m |
| **Lungh. tubo scarico** | |
| *Drain tube height/Largo tubo de descarga* (Ø 40 mm) | 1,50 m |

**DOTAZ. STANDARD filtro vasca integrale**
**DOTAZ. STANDARD integral tank filter**

## Accessori/Optionals/Accesorios

| | | |
|---|---|---|
| | DD | **dosatore detergente regolabile**<br>electric detergent dispenser<br>dosificador de detergente |
| | DP300 | **pompa di scarico H.p. 0,30**<br>drain pump H.p. 0,30<br>bomba de descarga H.p. 0,30 |
| | CA500 | **pompa di pressione H.p. 0,5**<br>booster pump H.p. 0,5<br>bomba de presion H.p. 0,5 |
| | DEP12 | **addolcitore a resine 12 litri**<br>cabin water softener 12 lt<br>descalsificador de resina 12 lts |
| | 1160 | **inserto portapiatti**<br>dishes insert<br>insertador para platos |
| | 950040 | **supporto per ceste**<br>support for hampers<br>ayuda para los cestos |
| | 1000090 | **piedini regolabili inox h 15 cm**<br>adjustable stainless steel feet h 15 cm<br>pies inox regulables h 15 cm |
| | HP 990<br>**Potenziato**<br>*Hight power / Potenciado* | **Assorbimento totale**<br>Total power input max/Potencia total 13,5 Kw<br>**Resistenza boiler**<br>Boiler heating element/Resistencia boiler 9,0 Kw<br>**Resistenza vasca**<br>Tank heating element/Resistencia cuba 3,0 + 3,0 Kw |
| | 1000091 | **piedini regolabili inox h 25/29 cm**<br>adjustable stainless steel feet h 25/29 cm<br>pies inox regulables h 25/29 cm |



| | |
|---|---|
| Dimensioni / Dimensions | 140x80x140 cm |
| Volume / Volume | 2,40 m³ |
| Peso lordo / Gross weight | 230,0 Kg |
| Peso netto / Net weight | 160,0 Kg |

## Imballo/Packing

## Dotazione standard/Standard equipment/Dotación standard

| | | | n° |
|---|---|---|---|
| | 950201 | Cesto inox<br>Basket 60x65x10 cm<br>Cesto inox | 2 |
| | 1159 | Inserto portateglie per cesto<br>insert 58x63x30 cm<br>Insertador bandejas para cesto | 2 |
| | 1154 | Inserto posate a 8 divisori<br>8 division cutlery insert<br>Insertador cubiertos con 8 divisiones | 2 |
| | 9501010 | Filtro vasca integrale<br>Integral tank filter<br>Filtro de cuba integral | 4 |
| | 1000090 | piedini regolabili inox h 15 cm<br>adjustable stainless steel feet h 15 cm<br>pies inox regulables h 15 cm | 4 |